

# Data Sheet for SAW Components



Band 5 Rx Single Filter

Product ID: LAS0882A17

Date: Dec. 31, 2020

Revision: 1.0

#### **Features**

◆ Package Size: 1.1 x 0.9 x 0.5max mm

◆ Single-Ended Input and Output

lacktriangle Terminating Impedance : 50 Ω

◆ Moisture Sensitivity Level 3

◆ ESD Sensitive Device



## **Electrical Specifications** Band5 Rx

Temperature Range for Specification :  $-30 \text{ to } +85 \text{ }^{\circ}\text{C}$ 

Ant to Rx			Min.	Тур.	Max.	Unit
Insertion Loss						
	869 - 894	MHz	-	1.2	1.6	dB
Pass Band Ripple						
	869 - 894	MHz	-	0.4	1.0	dB
VSWR						
	869 - 894	MHz	-	1.7	2.0	
Absolute Attenuation						\
	1 - 824	MHz	40	56	-	dB
	45	MHz	50	73	-	dB
	779 – 804	MHz	46	56	-	dB
	824 - 849	MHz	45	52	<u> </u>	dB
	846.5 - 854	MHz	28	37	-	dB
	1693 - 1788	MHz	40	52	-	dB
	1710 - 1785	MHz	40	52	-	dB
	2400 - 2500	MHz	33	45	-	dB
	2607 - 2682	MHz	33	44	-	dB
	3476 – 3576	MHz	30	40	-	dB
	4345 - 4470	MHz	30	37	-	dB
	4900 - 5950	MHz	25	34	-	dB
	5214 - 5364	MHz	25	35	-	dB
	5725 - 5875	MHz	25	34	-	dB
	6083 - 6258	MHz	20	33	-	dB
	6952 - 7152	MHz	20	32	-	dB
	7821 - 8046	MHz	15	32	-	dB

LAS0882A17 2 / 14 Rev. 1.0 2020.12



# **Maximum Ratings**

Item	Rating	Condition / Remark
Storage Temperature	-40 to +85 °C	
DC Voltage	5 V	+25 °C
Input Power	+15 dBm	LTE , +55 °C , 2000 h

Datasheet


## **Recommended Operating Conditions**

Item	Rating	Condition / Remark
Operating Temperature, T <sub>CASE</sub>	-30 to +85 °C	





## **Package Information**

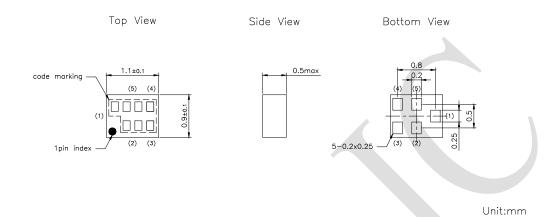

#### Pin Configuration

1 : Ant


4 : Rx

Other: GND

LAS0882A17 4 / 14 Rev. 1.0 2020.12




#### **Land Pattern**

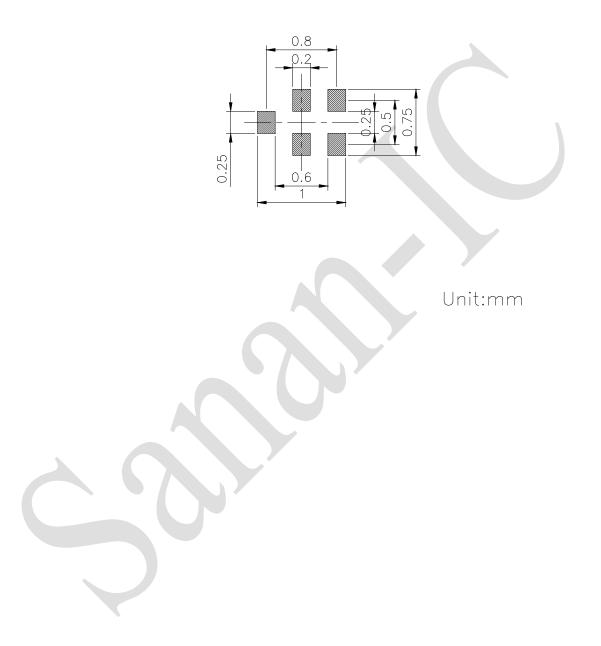

LAS0882A17 5 / 14 Rev. 1.0 2020.12



# **Application Circuit**

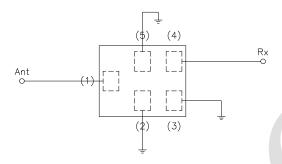

Port	Terminating Z	Matching Component
Ant	50 Ω	
Rx	50 Ω	


For ESD protection, external shunt inductor at all ports is recommended.


LAS0882A17 6 / 14 Rev. 1.0 2020.12




#### **Electrical Characteristics** Band5 Rx

#### Ant to Rx

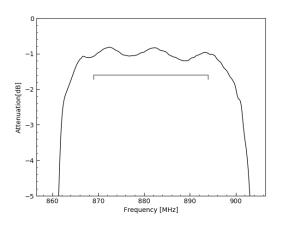

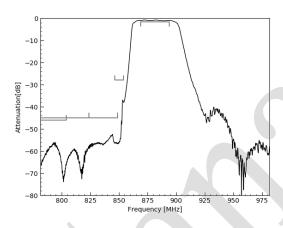

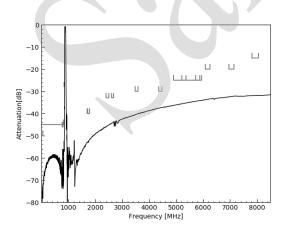


LAS0882A17 7 / 14 Rev. 1.0 2020.12




#### **Electrical Characteristics** Band5 Rx

## **Ant Port Impedance**




# **Rx Port Impedance**

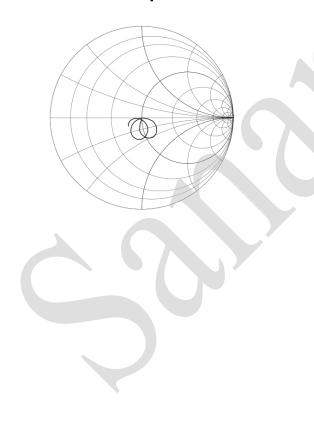

LAS0882A17 8 / 14 Rev. 1.0 2020.12



#### **Marking Information**

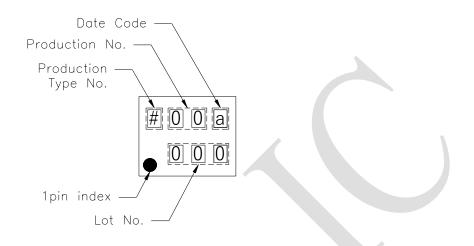

Production type No. (S: Sample, P: Production)

Product No.: 17

Lot No. (Indicated by  $0 \sim 9$  or A to Z and a to z, except I, O, i, o and I)


#### Product date code:

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2020	А	В	U	Δ	Е	F	G	Н	J	K	L	М
2021	N	Р	Q	R	S	Т	U	V	W	X	Y	Z
2022	а	b	С	d	е	f	g	h	j	k	I	m
2023	n	р	q	r	S	t	u	V	W	Х	У	Z


LAS0882A17 9 / 14 Rev. 1.0 2020.12



# **Tape Information**

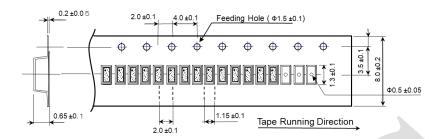


**UNIT:** mm

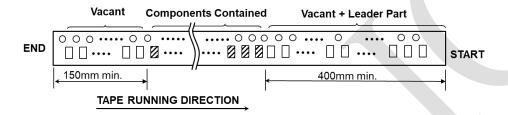

LAS0882A17 10 / 14 Rev. 1.0 2020.12



#### **Reel Information**

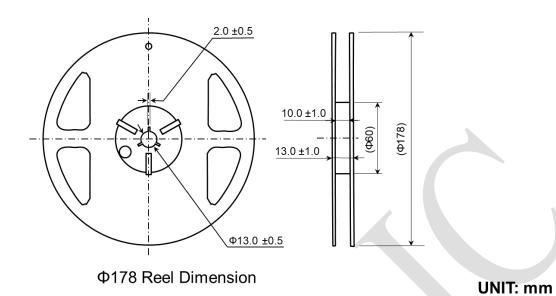



# **Ordering Code**

Part Number	Description	
LAS0882A1717-SA	Bulk (few pieces)	
LAS0882A1717-MB	Tape & Reel 3,000 pcs/reel	
LAS0882A1717-MC	Tape & Reel 10,000 pcs/reel	
LAS0882A1717-SZ	EVB	

**Datasheet** 





# **Revision History**

Revision	Date	Description			
1.0	Dec. 31, 2020	•	Initial Release		



LAS0882A17 13 / 14 Rev. 1.0 2020.12



#### **Important Notice**

The information contained herein is as of the date of issue. The products or all information contained herein is subject to change without notice. Quanzhou Sanan Integrated Circuit Co., Ltd. and subsidiaries (hereinafter referred to as "Sanan") assumes no responsibility for errors or omissions in the information contained herein. Customers should verify the latest relevant information before ordering for Sanan products.

All of the contents may be used only for informational purposes by the customer. The information contained herein or any use of such information or Sanan products does not grant, either expressed or implied, to any party the intellectual property rights, patent rights, licenses and related rights. Sanan assume no responsibility for any damages and defects from the use of the information contained herein. Customers should verify Sanan products in actual condition and operating environment before using.

Sanan products are intended for use in mobile phone, PC, AV equipment, OA equipment, home electric appliances, office equipment, or other general electronic equipment. Sanan products are not warranted or authorized for use as critical components in aircraft, power plant, medical, life-saving, life-sustaining and other high reliability applications which can cause severe damages or personal injury or death.

The scope of the warranty of Sanan products is limited to products alone and Sanan does not assume any responsibility for any damages induced by the failure of the products without the express written agreement of Sanan.

Not to be used, duplicated, reproduced, modified, republished and revealed in whole or in part to others without the express written permission of Sanan.

Copyright © 2020 Quanzhou Sanan Integrated Circuit Co., Ltd. All Rights Reserved.

LAS0882A17 14 / 14 Rev. 1.0 2020.12