

Data Sheet for

SAW Components

Band 1 + 3

Rx Dual Filter



Product ID: LBB2140D19

Date: Dec. 22, 2020

Revision: 1.1

Features

- ◆ Package Size : 1.5 x 1.1 x 0.5max mm
- ◆ Single-Ended Input and Output
- ◆ Terminating Impedance : 50 Ω
- ◆ Moisture Sensitivity Level 3
- ◆ ESD Sensitive Device

Electrical Specifications Band 1 + 3 Rx Dual Filter

Temperature Range for Specification : -30 to +85 °C

Ant to B3Rx					Min.	Typ.	Max.	Unit
Insertion Loss								
	1805	-	1880	MHz	-	1.8	3.5	dB
Pass Band Ripple								
	1805	-	1880	MHz	-	1.1	2.5	dB
VSWR Rx								
	1805	-	1880	MHz	-	1.5	2.0	-
VSWR Ant								
	1805	-	1880	MHz	-	1.4	2.0	-
Absolute Attenuation								
	1	-	1710	MHz	27	32	-	dB
			95	MHz	50	98	-	dB
	824	-	849	MHz	39	42	-	dB
	832	-	862	MHz	38	41	-	dB
	880	-	915	MHz	37	40	-	dB
	1615	-	1690	MHz	30	32	-	dB
	1710	-	1785	MHz	34	38	-	dB
	1785	-	1790	MHz	1	45	-	dB
	1920	-	1980	MHz	36	40	-	dB
	1920	-	6000	MHz	26	36	-	dB
	2400	-	2500	MHz	34	37	-	dB
	2500	-	2570	MHz	32	36	-	dB
	3515	-	3610	MHz	36	52	-	dB
	3610	-	3760	MHz	35	49	-	dB
	3760	-	6000	MHz	14	42	-	dB
	4900	-	5950	MHz	26	42	-	dB
	5225	-	5415	MHz	27	43	-	dB
	5415	-	5640	MHz	27	43	-	dB
	7220	-	7520	MHz	20	24	-	dB

Electrical Specifications Band 1 + 3 Rx Dual Filter

Temperature Range for Specification : -30 to +85 °C

Ant to B1Rx	Min.	Typ.	Max.	Unit
Insertion Loss				
2110 - 2170 MHz	-	1.7	2.8	dB
Pass Band Ripple				
2110 - 2170 MHz	-	0.4	2.0	dB
VSWR Rx				
2110 - 2170 MHz	-	1.6	2.0	-
VSWR Ant				
2110 - 2170 MHz	-	1.3	2.0	-
Absolute Attenuation				
10 - 1920 MHz	24	45	-	dB
190 - 400 MHz	50	92	-	dB
400 - 400 MHz	50	73	-	dB
699 - 716 MHz	50	59	-	dB
777 - 787 MHz	40	57	-	dB
810 - 830 MHz	48	56	-	dB
814 - 849 MHz	40	55	-	dB
824 - 849 MHz	46	55	-	dB
880 - 915 MHz	40	54	-	dB
898 - 925 MHz	46	54	-	dB
1710 - 1785 MHz	42	47	-	dB
1730 - 1920 MHz	34	45	-	dB
1920 - 1980 MHz	42	49	-	dB
2015 - 2075 MHz	10	27	-	dB
2185 - 6130 MHz	1	2	-	dB
2400 - 2500 MHz	33	45	-	dB
4030 - 4150 MHz	37	41	-	dB
4220 - 4340 MHz	36	41	-	dB
4340 - 6000 MHz	15	34	-	dB
4900 - 5950 MHz	30	36	-	dB
5950 - 6130 MHz	29	36	-	dB
6330 - 6510 MHz	28	35	-	dB


Maximum Ratings

Item	Rating	Condition / Remark
Storage Temperature	-40 to +85 °C	
DC Voltage	5 V	+25 °C
Input power	+15 dBm	LTE , +55 °C , 2000 h

Recommended Operating Conditions

Item	Rating	Condition / Remark
Operating Temperature, T _{CASE}	-30 to +85 °C	

Application Circuit

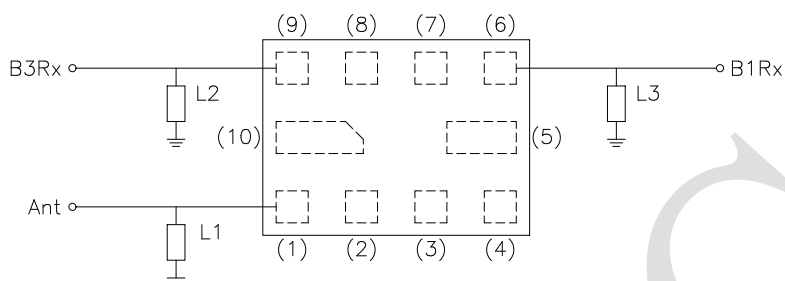


Port	Terminating Z	Matching Component
Ant	50 Ω	L1 : 3.0nH (Ideal inductor)
B3Rx	50 Ω	L2 : 12nH (Ideal inductor)
B1Rx	50 Ω	L3 : 12nH (Ideal inductor)

For ESD protection, external shunt inductor at all ports is recommended.






Electrical Characteristics

Band 1 + 3 Rx Dual Filter

Ant to B3Rx

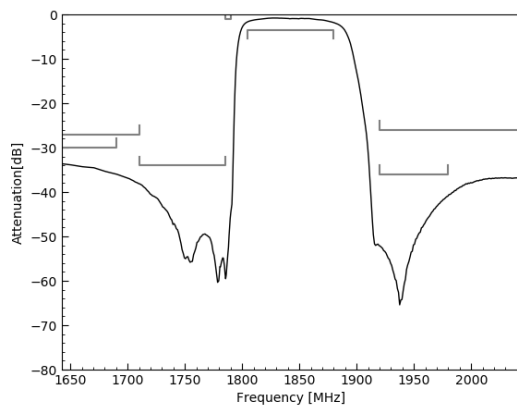

Ant to B1Rx

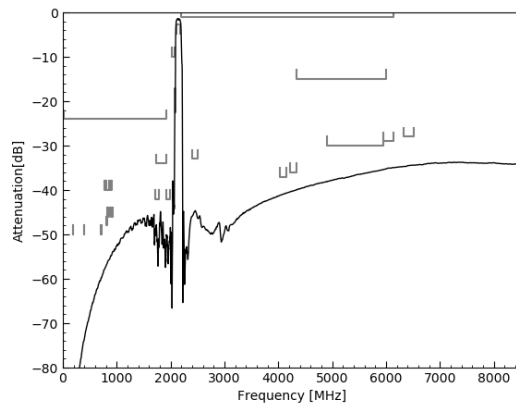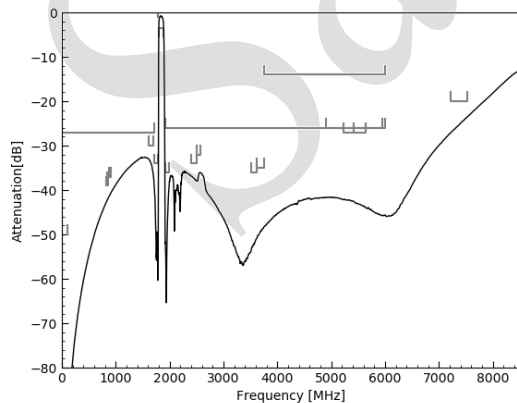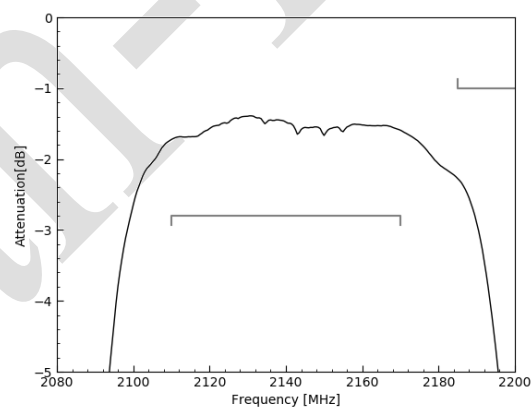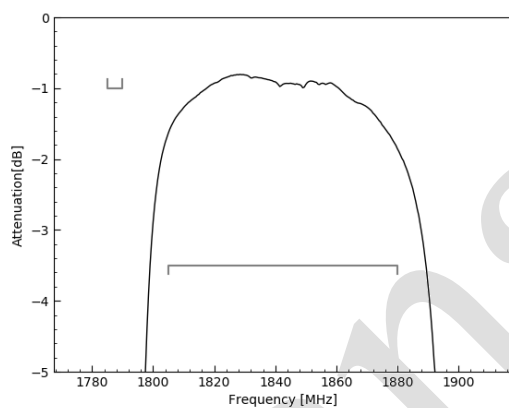
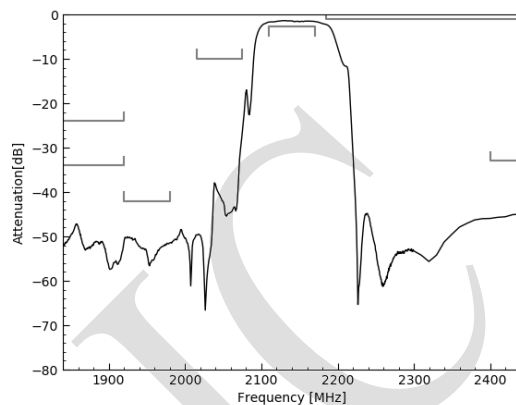


Electrical Characteristics

Band 1 + 3 Rx Dual Filter



Ant Impedance (B3Rx band)

Ant Impedance (B1Rx band)

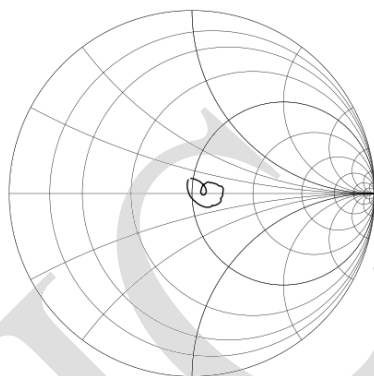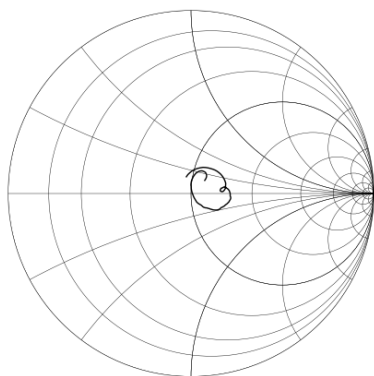


B3Rx Impedance

B1Rx Impedance

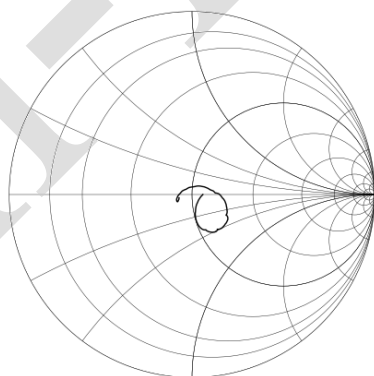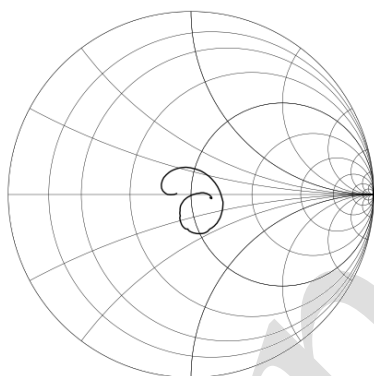

Marking Information

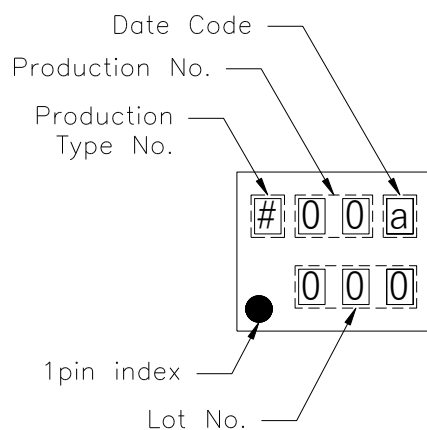

Production type No. (S: Sample, P: Production)


Product No. : 19

Lot No. (Indicated by 0 ~ 9 or A to Z and a to z, except I, O, i, o and l)


Product date code :

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2020	A	B	C	D	E	F	G	H	J	K	L	M
2021	N	P	Q	R	S	T	U	V	W	X	Y	Z
2022	a	b	c	d	e	f	g	h	j	k	l	m
2023	n	p	q	r	s	t	u	v	w	x	y	z


Tape Information

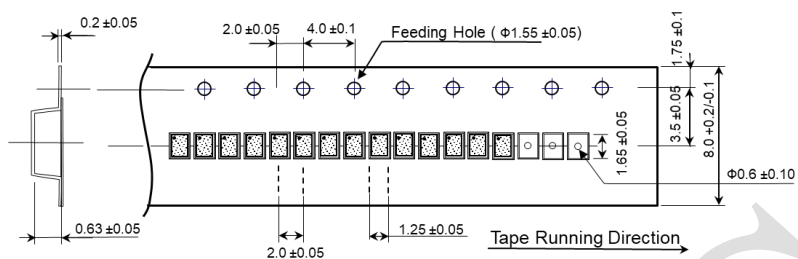

UNIT: mm

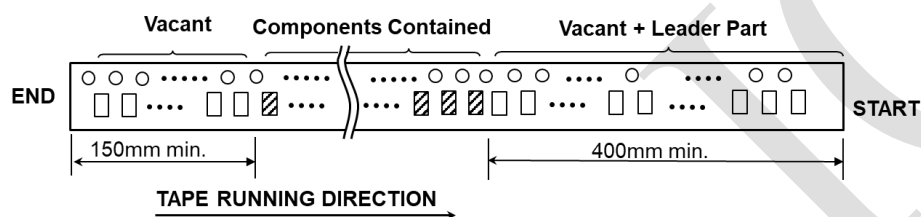


Reel Information

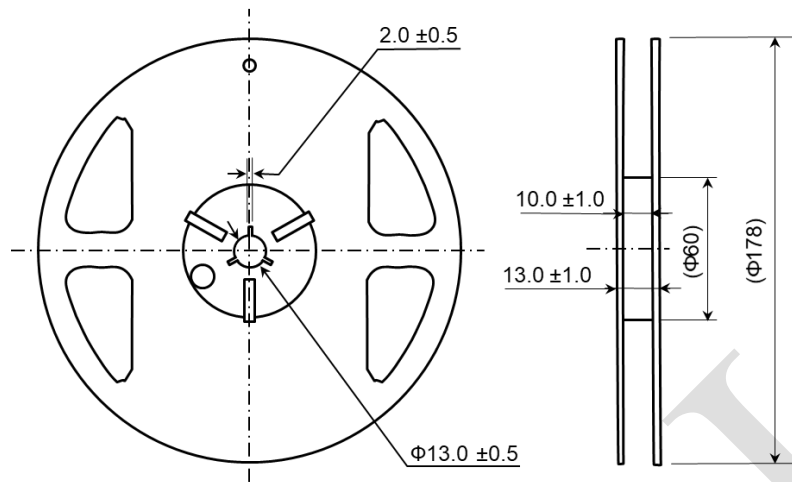

Φ178 Reel Dimension

UNIT: mm

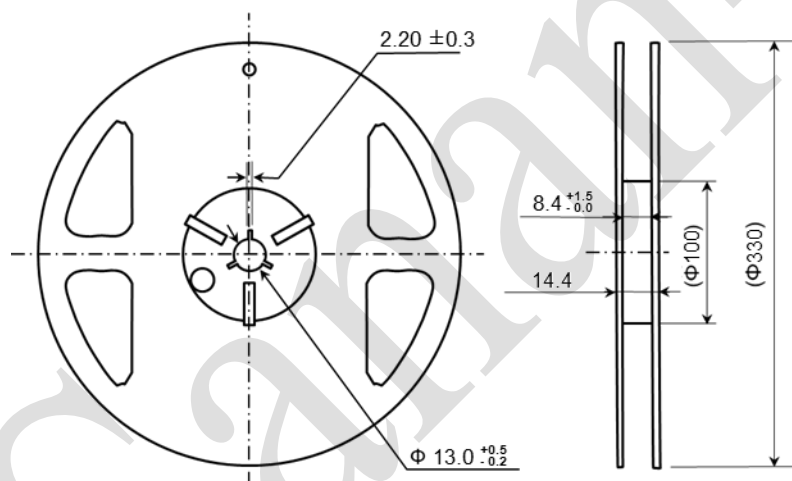

Φ330 Reel Dimension

UNIT: mm

Ordering Code

Part Number	Description
LBB2140D19-SA	Bulk (few pieces)
LBB2140D19-MB	Tape & Reel 3,000 pcs/reel
LBB2140D19-MC	Tape & Reel 10,000 pcs/reel
LBB2140D19-SZ	EVB

Revision History

Revision	Date	Description
1.0	Dec. 1, 2020	● Initial release
1.1	Dec. 22, 2020	● Update "Reel Information" and "Ordering Code"

Important Notice

The information contained herein is as of the date of issue. The products or all information contained herein is subject to change without notice. Quanzhou Sanan Integrated Circuit Co., Ltd. and subsidiaries (hereinafter referred to as "Sanan") assumes no responsibility for errors or omissions in the information contained herein. Customers should verify the latest relevant information before ordering for Sanan products.

All of the contents may be used only for informational purposes by the customer. The information contained herein or any use of such information or Sanan products does not grant, either expressed or implied, to any party the intellectual property rights, patent rights, licenses and related rights. Sanan assume no responsibility for any damages and defects from the use of the information contained herein. Customers should verify Sanan products in actual condition and operating environment before using.

Sanan products are intended for use in mobile phone, PC, AV equipment, OA equipment, home electric appliances, office equipment, or other general electronic equipment. Sanan products are not warranted or authorized for use as critical components in aircraft, power plant, medical, life-saving, life-sustaining and other high reliability applications which can cause severe damages or personal injury or death.

The scope of the warranty of Sanan products is limited to products alone and Sanan does not assume any responsibility for any damages induced by the failure of the products without the express written agreement of Sanan.

Not to be used, duplicated, reproduced, modified, republished and revealed in whole or in part to others without the express written permission of Sanan.