


Data Sheet for SAW Components



Band 7

Duplexer

Product ID: RBD2655G2M

Date: Aug. 22, 2023

Revision: 1.0

Features

- ◆ Package Size : 1.6 x 1.2 x 0.6max mm
- ◆ Single-Ended Input and Output
- ◆ Terminating Impedance : 50 Ω
- ◆ Moisture Sensitivity Level 3
- ◆ ESD Sensitive Device
- ◆ TC-SAW

Electrical Specifications Band 7 Duplexer

Temperature Range for Specification : -30 to +85 °C

Tx to Ant	Min.	Typ.	Max.	Unit
Insertion Loss				
2500.25 - 2569.75 MHz	-	1.7	2.1	dB
Pass Band Ripple				
2500.25 - 2569.75 MHz	-	0.8	1.6	dB
VSWR Tx				
2500.25 - 2569.75 MHz	-	1.4	2.0	-
VSWR Ant				
2500.25 - 2569.75 MHz	-	1.3	2.0	-
Absolute Attenuation				
10 - 1559 MHz	35	47	-	dB
791 - 821 MHz	35	59	-	dB
1166.22 - 1254 MHz	35	51	-	dB
1559 - 1563 MHz	40	47	-	dB
1565.42 - 1585.42 MHz	40	47	-	dB
1597.55 - 1605.89 MHz	40	46	-	dB
2110 - 2170 MHz	40	57	-	dB
1805 - 1880 MHz	40	45	-	dB
2401 - 2468 MHz	35	50	-	dB _{INT} ^{*1}
2451 - 2473 MHz	20	50	-	dB _{INT} ^{*1}
2456 - 2478 MHz	10	32	-	dB _{INT} ^{*1}
2461 - 2483 MHz	8	15	-	dB _{INT} ^{*1}
2620.25 - 2689.75 MHz	45	58	-	dB
3300 - 3800 MHz	30	50	-	dB
3800 - 4200 MHz	30	60	-	dB
4400 - 5000 MHz	30	47	-	dB
4900 - 5950 MHz	30	45	-	dB
5000 - 5140 MHz	42	47	-	dB
5150 - 5925 MHz	30	45	-	dB
7500 - 7710 MHz	20	49	-	dB

*1: Integrated |S₂₁| over the center 18 MHz CH BW and converting to dB value

Electrical Specifications Band 7 Duplexer

Temperature Range for Specification : -30 to +85 °C

Ant to Rx	Min.	Typ.	Max.	Unit
Insertion Loss				
2620.25 - 2689.75 MHz	-	1.9	2.4	dB
Pass Band Ripple				
2620.25 - 2689.75 MHz	-	1.0	1.6	dB
VSWR Rx				
2620.25 - 2689.75 MHz	-	1.4	2.0	-
VSWR Ant				
2620.25 - 2689.75 MHz	-	1.2	2.0	-
Absolute Attenuation				
120 MHz	50	115	-	dB
10 - 2500 MHz	33	40	-	dB
718 - 748 MHz	45	65	-	dB
832 - 862 MHz	45	61	-	dB
880 - 915 MHz	45	59	-	dB
1710 - 1785 MHz	36	40	-	dB
1920 - 1980 MHz	33	41	-	dB
2400 - 2483 MHz	45	53	-	dB
2500.25 - 2569.75 MHz	48	61	-	dB
5150 - 5925 MHz	35	50	-	dB
7620 - 7830 MHz	20	40	-	dB

Electrical Specifications Band 7 Duplexer

Temperature Range for Specification : -30 to +85 °C

Ant to Rx	Min.	Typ.	Max.	Unit
Isolation				
2500.25 - 2569.75 MHz	55	62	-	dB
2620.25 - 2689.75 MHz	55	60	-	dB


Maximum Ratings

Item	Rating	Condition / Remark
Storage Temperature	-40 to +85 °C	
DC Voltage	5 V	+25 °C
Input power	+30 dBm	LTE , +55 °C , 5000 h

Recommended Operating Conditions

Item	Rating	Condition / Remark
Operating Temperature, T _{CASE}	-30 to +85 °C	


Package Information

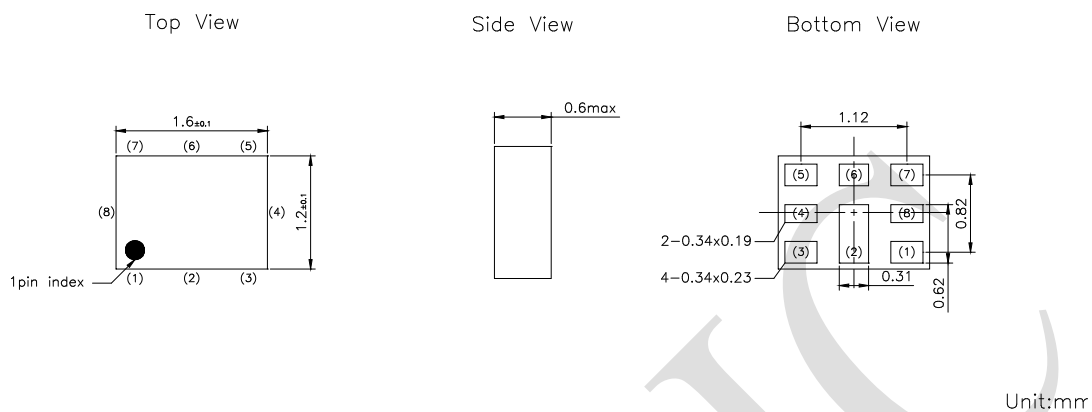

Pin Configuration


1	:	Rx
3	:	Tx
6	:	Ant
Other	:	GND

Land Pattern

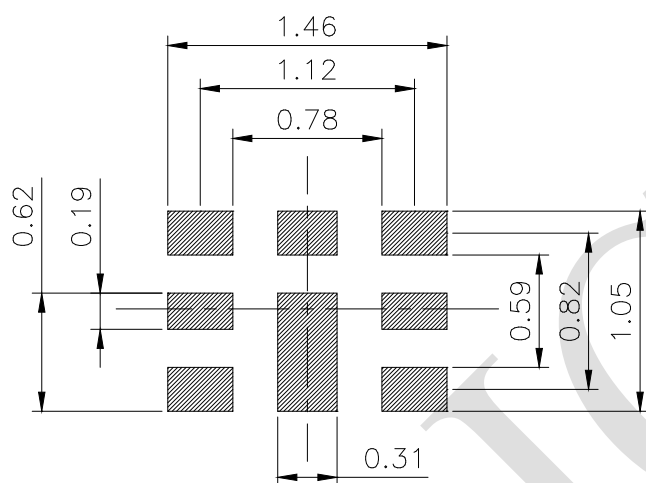

Unit:mm

Application Circuit

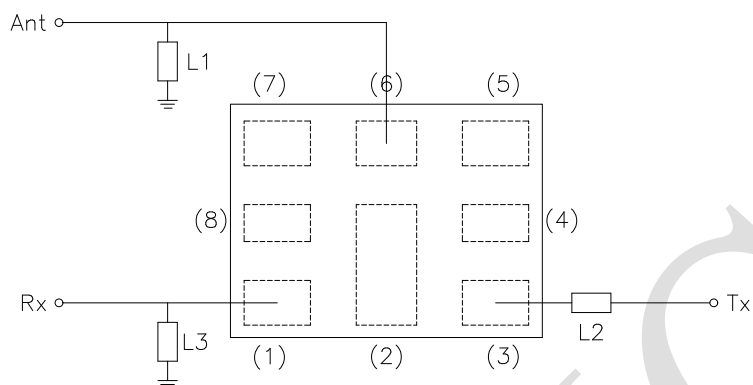


Port	Terminating Z	Matching Component
Ant	50 Ω	L1 : 3nH (Ideal inductor)
Tx	50 Ω	L2 : 2nH (Ideal inductor)
Rx	50 Ω	L3 : 4nH (Ideal inductor)

For ESD protection, external shunt inductor at all ports is recommended.






Electrical Characteristics

Band 7 Duplexer

Tx to Ant

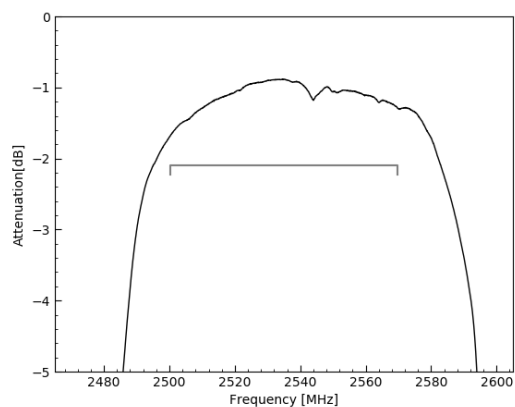



Ant to Rx

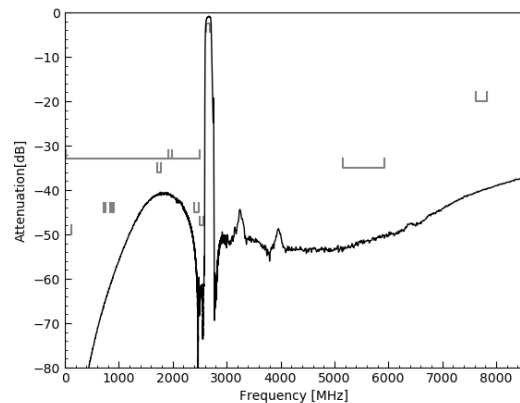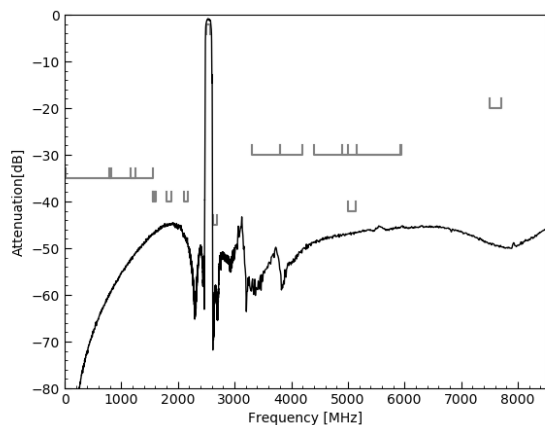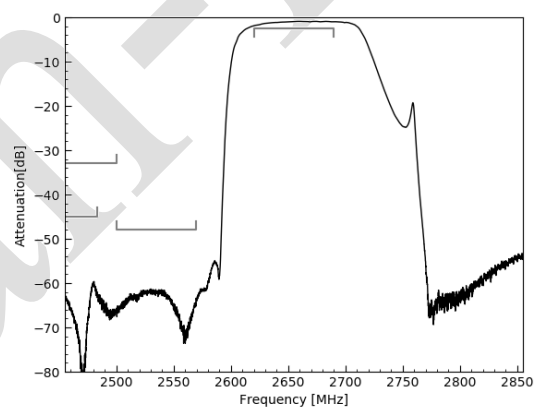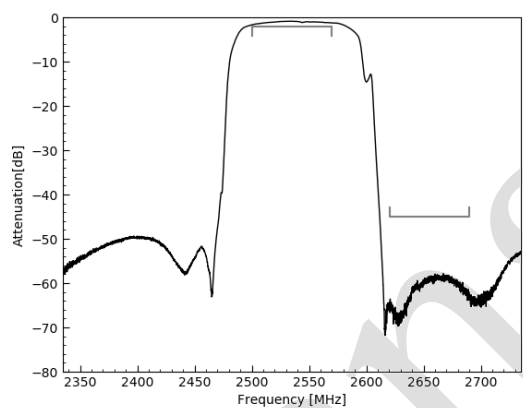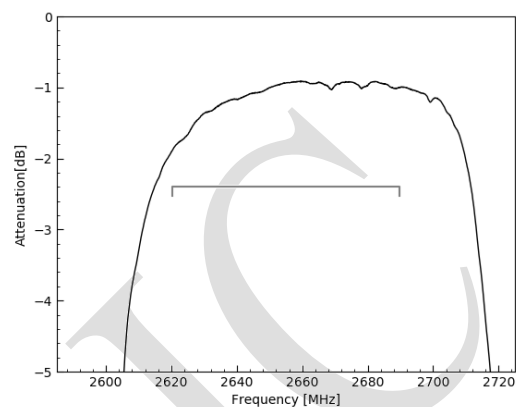

Electrical Characteristics

Band 7 Duplexer

Tx to Rx

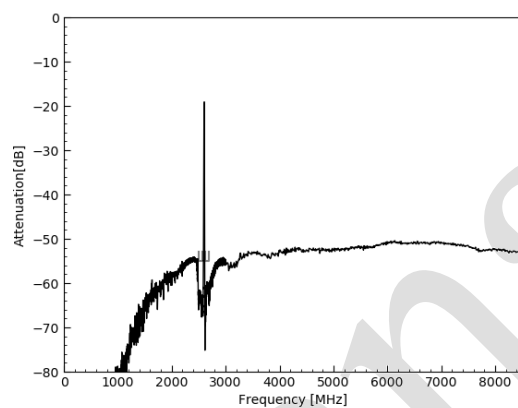
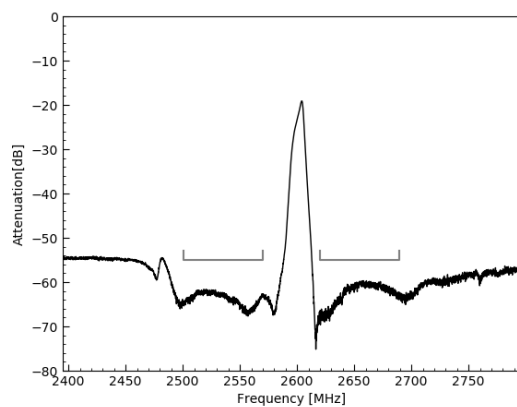


Electrical Characteristics

Band 7 Duplexer



Ant Port Impedance (Tx band)

Ant Port Impedance (Rx band)

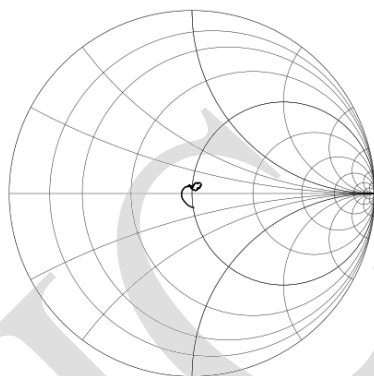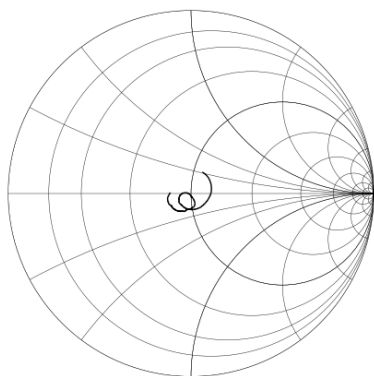


Tx Impedance

Rx Impedance

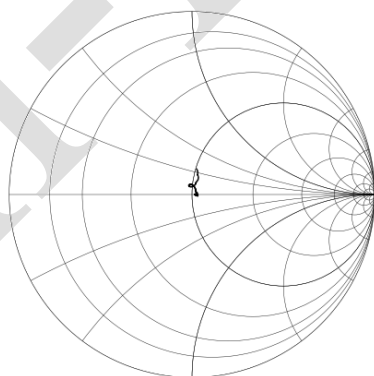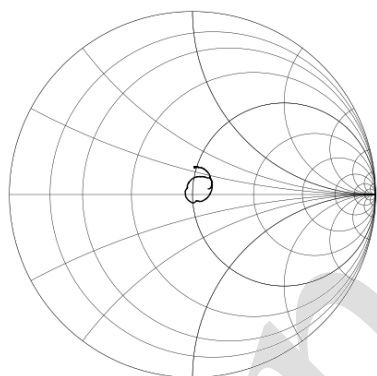

Marking Information

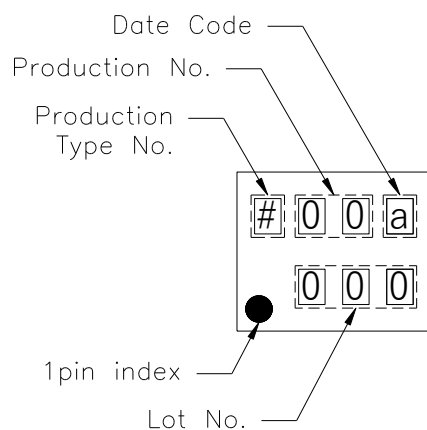

Production type No. (S: Sample, P: Production)

Product No. : 2M

Lot No. (Indicated by 0 ~ 9 or A to Z and a to z, except I, O, i, o and l)

Product date code :

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2023	n	p	q	r	s	t	u	v	w	x	y	z
2024	A	B	C	D	E	F	G	H	J	K	L	M
2025	N	P	Q	R	S	T	U	V	W	X	Y	Z
2026	a	b	c	d	e	f	g	h	j	k	l	m

Technical drawing of a tape reel showing dimensions and components. The drawing includes a side view on the left and a top view of the reel body. Key dimensions and features are labeled:


- Top View Dimensions:**
 - Overall width: 0.2 ± 0.03
 - Distance between mounting holes: 2.0 ± 0.05
 - Distance between mounting holes: 4.0 ± 0.1
 - Feeding Hole ($\Phi 1.55 \pm 0.05$)
 - Distance between mounting holes: 1.78 ± 0.05
 - Distance between mounting holes: 1.36 ± 0.02
 - Distance between mounting holes: 4.0 ± 0.1
 - Overall height: $8.0 \pm 0.2 \pm 0.1$
 - Distance between mounting holes: 3.5 ± 0.05
 - Overall diameter: $\Phi 0.60 \pm 0.10$
- Side View Dimensions:**
 - Overall width: 0.72 ± 0.05
- Other Labels:**
 - Tape Running Direction (indicated by an arrow pointing right)

The diagram illustrates the layout of a magnetic tape. It is divided into three main sections from left to right:

- Vacant:** The first section, starting from the **END** of the tape, with a minimum length of 150mm. It contains two rows of symbols: the top row has circles and the bottom row has squares.
- Components Contained:** The middle section, separated from the first by a break symbol (two parallel wavy lines). It contains two rows of symbols: the top row has circles and the bottom row has squares, some of which are shaded with diagonal lines.
- Vacant + Leader Part:** The final section, with a minimum length of 400mm, ending at the **START** of the tape. It contains two rows of symbols: the top row has circles and the bottom row has squares, some of which are shaded with diagonal lines.


Below the tape, an arrow points from left to right, labeled **TAPE RUNNING DIRECTION**.

Reel Information

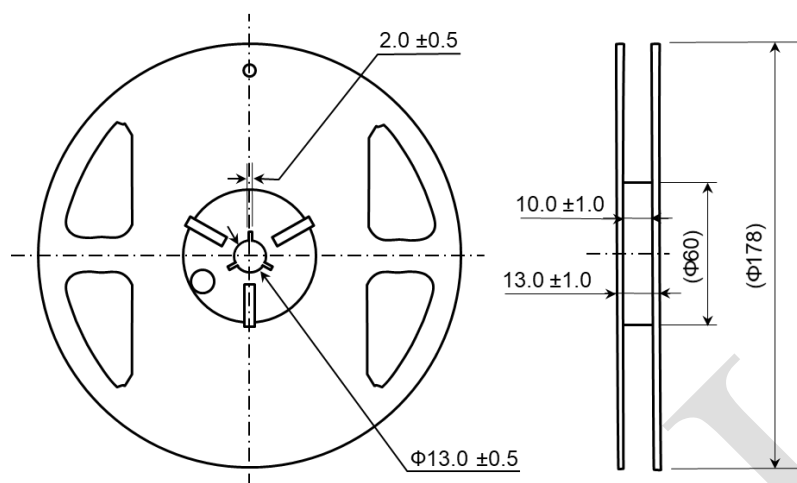

$\Phi 178$ Reel Dimension

UNIT: mm

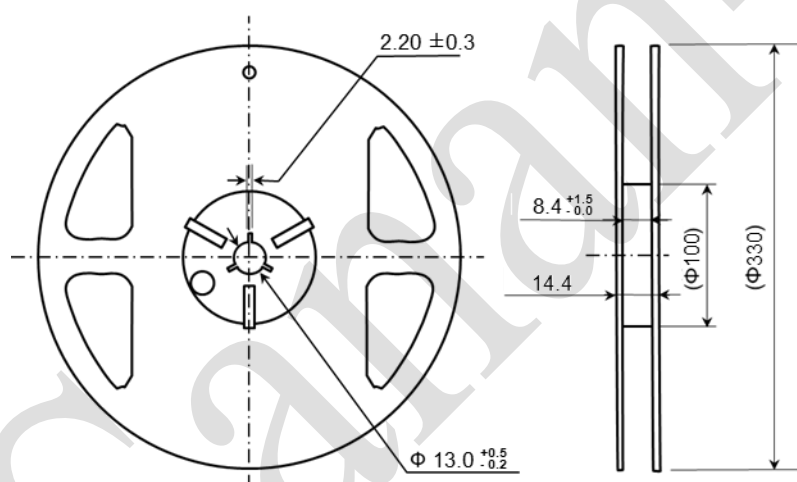

$\Phi 330$ Reel Dimension

UNIT: mm

Ordering Code

Part Number	Description
RBD2655G2M-SA	Bulk (few pieces)
RBD2655G2M-MB	Tape & Reel 3,000 pcs/reel
RBD2655G2M-MC	Tape & Reel 10,000 pcs/reel
RBD2655G2M-SZ	EVB

Revision History

Revision	Date	Description
0.1	Oct. 06, 2022	● Initial release (Preliminary)
1.0	Aug. 22, 2023	● Update product No. ● Update Maximum Ratings Input power

Important Notice

The information contained herein is as of the date of issue. The products or all information contained herein is subject to change without notice. Quanzhou Sanan Integrated Circuit Co., Ltd. and subsidiaries (hereinafter referred to as "Sanan") assumes no responsibility for errors or omissions in the information contained herein. Customers should verify the latest relevant information before ordering for Sanan products.

All of the contents may be used only for informational purposes by the customer. The information contained herein or any use of such information or Sanan products does not grant, either expressed or implied, to any party the intellectual property rights, patent rights, licenses and related rights. Sanan assume no responsibility for any damages and defects from the use of the information contained herein. Customers should verify Sanan products in actual condition and operating environment before using.

Sanan products are intended for use in mobile phone, PC, AV equipment, OA equipment, home electric appliances, office equipment, or other general electronic equipment. Sanan products are not warranted or authorized for use as critical components in aircraft, power plant, medical, life-saving, life-sustaining and other high reliability applications which can cause severe damages or personal injury or death.

The scope of the warranty of Sanan products is limited to products alone and Sanan does not assume any responsibility for any damages induced by the failure of the products without the express written agreement of Sanan.

Not to be used, duplicated, reproduced, modified, republished and revealed in whole or in part to others without the express written permission of Sanan.