


Data Sheet for SAW Components

Band 34 + 39

Dual Filter



Product ID: LBB2018D0D

Date: Dec. 22, 2020

Revision: 1.1

Features

- ◆ Package Size : 1.5 x 1.1 x 0.5max mm
- ◆ Single-Ended Input and Output
- ◆ Terminating Impedance : 50 Ω
- ◆ Moisture Sensitivity Level 3
- ◆ ESD Sensitive Device

Electrical Specifications Band34+39 Dual Filter

Temperature Range for Specification : -30 to +85 °C

Ant to Rx		Min.	Typ.	Max.	Unit
Insertion Loss	1880 – 1920 MHz	-	1.4	2.0	dB
	2010 – 2025 MHz	-	1.4	2.0	dB
Pass Band Ripple	1880 – 1920 MHz	-	0.4	1.5	dB
	2010 – 2025 MHz	-	0.2	1.0	dB
Rx port VSWR	1880 – 1920 MHz	-	1.5	2.0	-
	2010 – 2025 MHz	-	1.2	2.0	-
Ant port VSWR	1880 – 1920 MHz	-	1.5	2.0	-
	2010 – 2025 MHz	-	1.2	2.0	-
Absolute Attenuation	10 – 1013 MHz	34	42	-	dB
	1000 – 1500 MHz	22	30	-	dB
	1500 – 1795 MHz	22	28	-	dB
	1795 – 1820 MHz	15	32	-	dB
	1820 – 1840 MHz	10	26	-	dB
	1950 – 1990 MHz	2.5	3.5	-	dB
	2045 – 2075 MHz	1.5	2.5	-	dB
	2075 – 2110 MHz	20	24	-	dB
	2110 – 2170 MHz	27	34	-	dB
	2170 – 2500 MHz	25	30	-	dB
	2500 – 4000 MHz	25	31	-	dB
	4000 – 6000 MHz	35	42	-	dB


Maximum Ratings

Item	Rating	Condition / Remark
Storage Temperature	-40 to +85 °C	
DC Voltage	5 V	+25 °C
Input power	+15dBm	LTE , +55 °C , 2000 h

Recommended Operating Conditions


Item	Rating	Condition / Remark
Operating Temperature, T _{CASE}	-30 to +85 °C	

Package Information

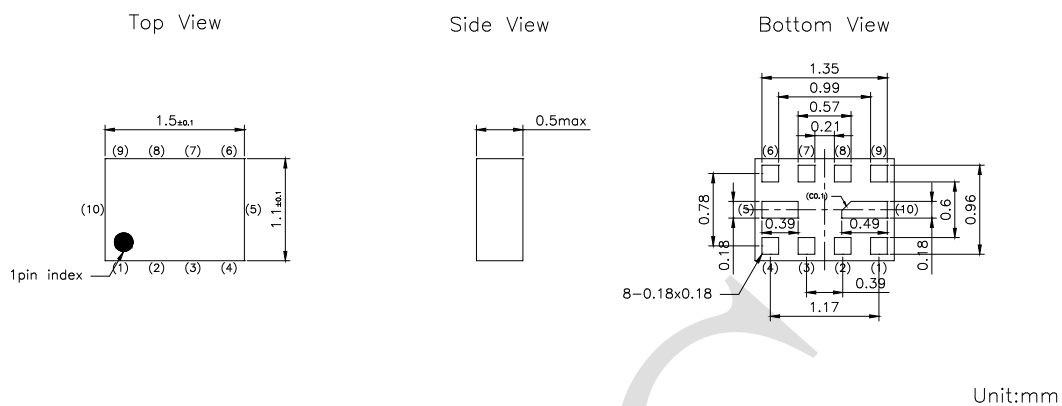


Pin Configuration

1 : Ant port
 6 : Rx port
 Other : GND

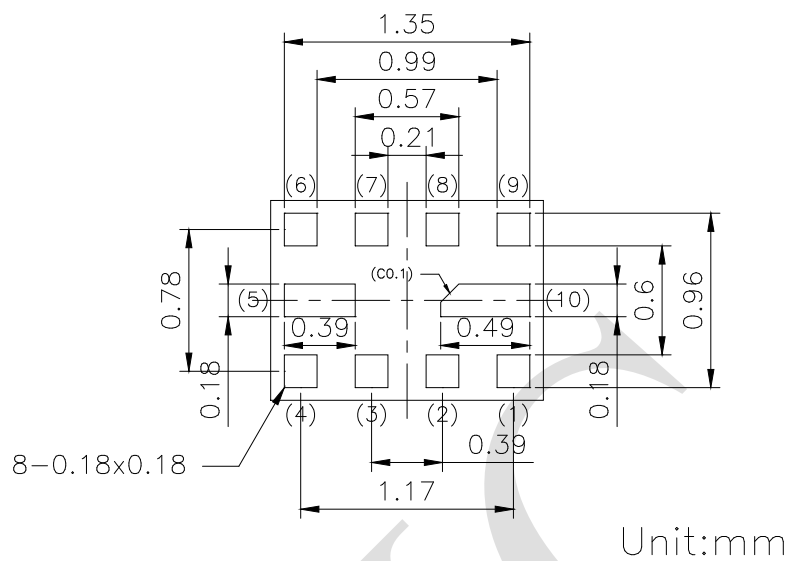

Application Circuit

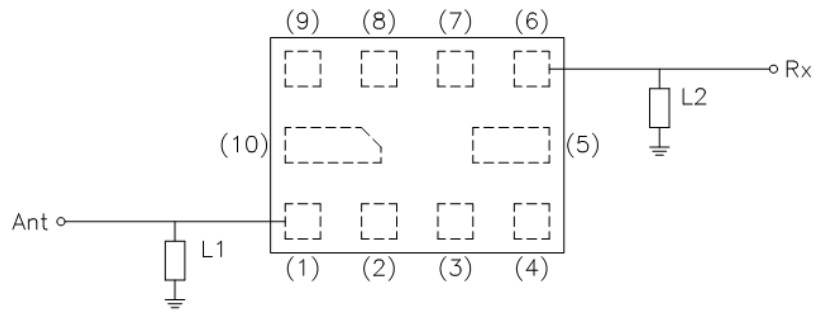


Port	Terminating Z	Matching Component
Ant	50 Ω	L1 : 4.3nH (Ideal inductor)
Rx	50 Ω	L2 : 3.6nH (Ideal inductor)

For ESD protection, external shunt inductor at all ports is recommended.






Electrical Characteristics

Band34+39 Dual Filter

Band39 Ant to Rx

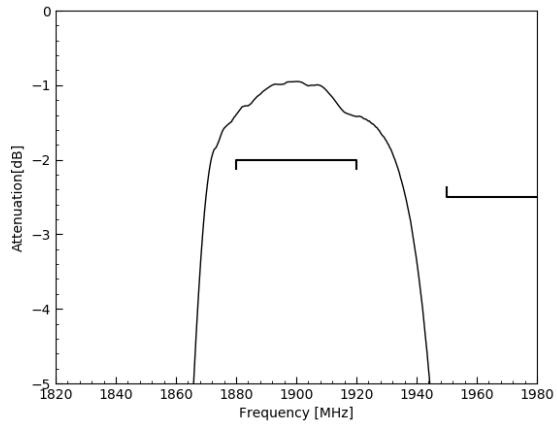


Band34 Ant to Rx

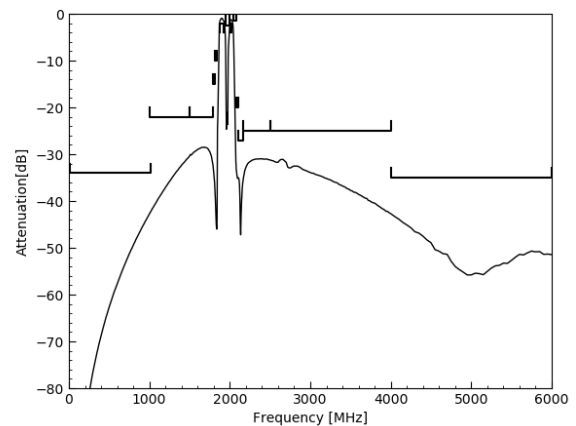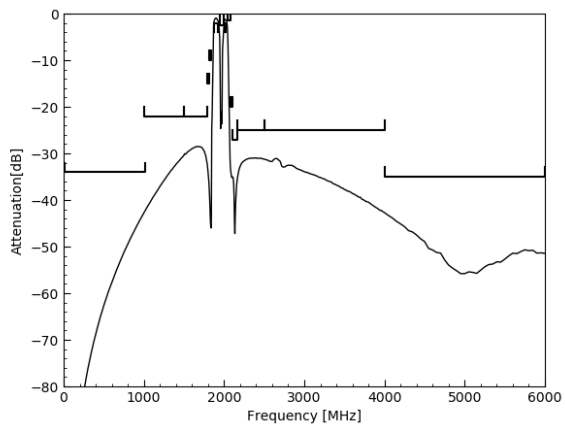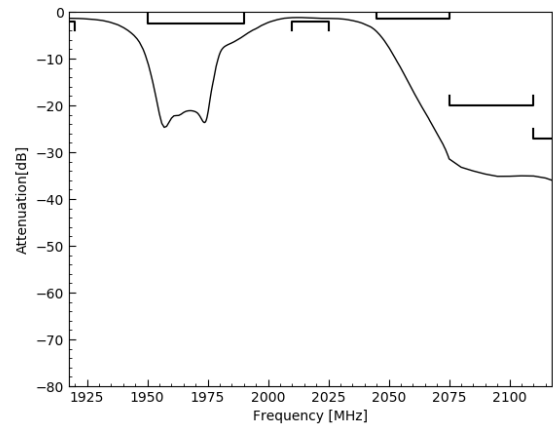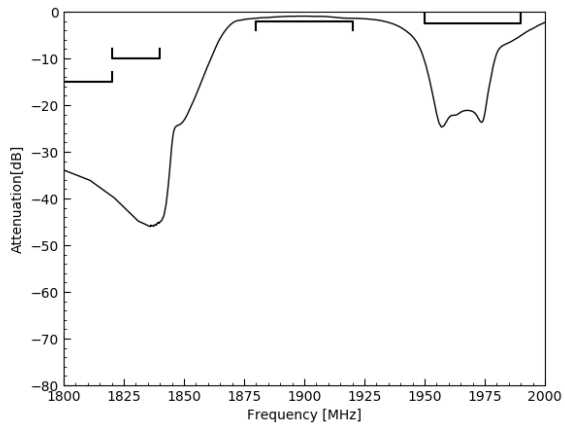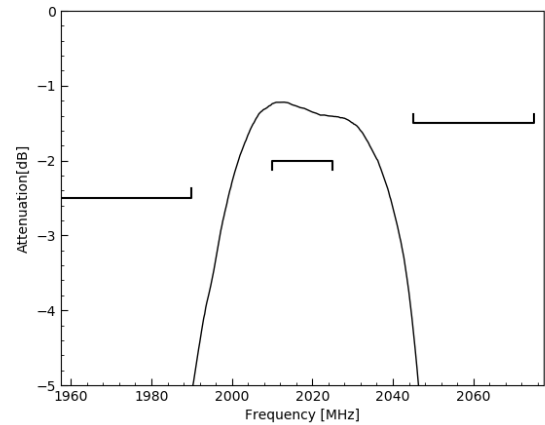


Electrical Characteristics

Band34+39 Dual Filter


Band39 Ant port Impedance

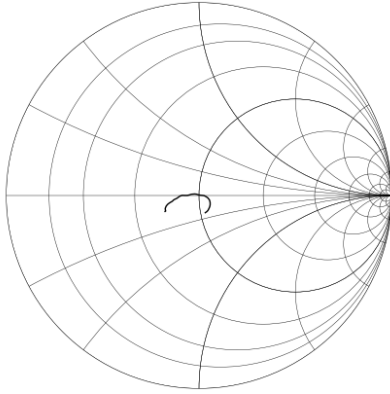


Band34 Ant port Impedance

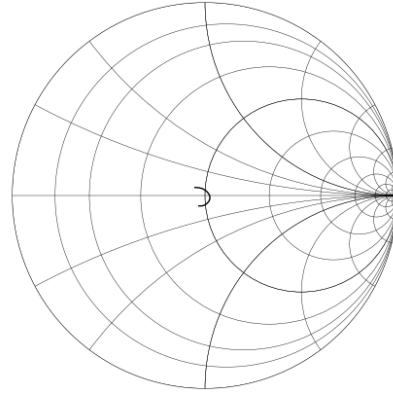


Band39 Rx port Impedance

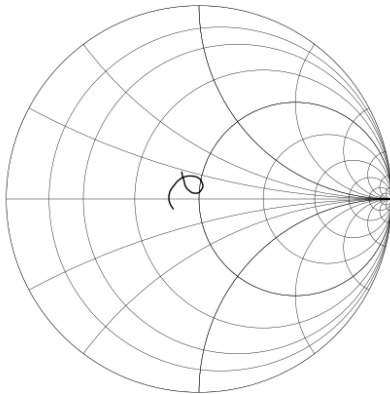

Band34 Rx port Impedance

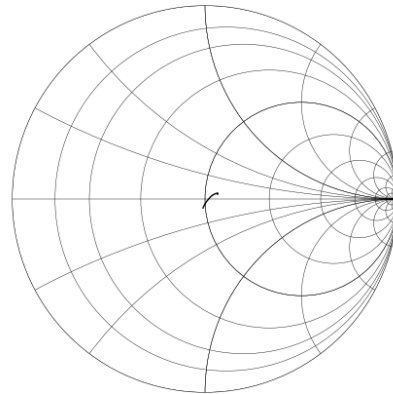

Marking Information

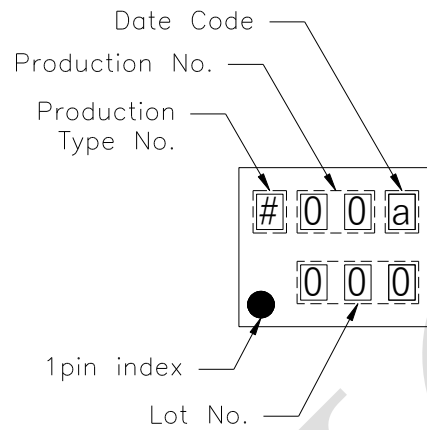

Production type No. (S: Sample, P: Production)


Product No. : 0D

Lot No. (Indicated by 0 ~ 9 or A to Z and a to z, except I, O, i, o and l)


Product date code :

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2020	A	B	C	D	E	F	G	H	J	K	L	M
2021	N	P	Q	R	S	T	U	V	W	X	Y	Z
2022	a	b	c	d	e	f	g	h	j	k	l	m
2023	n	p	q	r	s	t	u	v	w	x	y	z


Tape Information

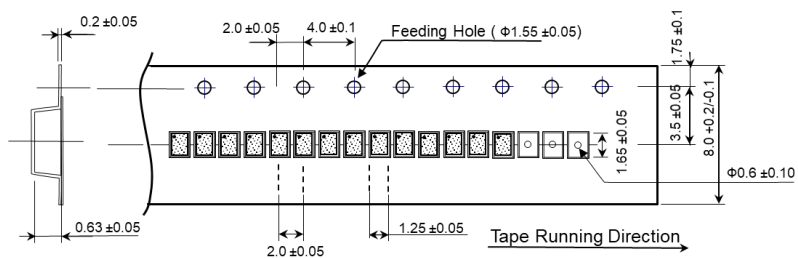

UNIT: mm

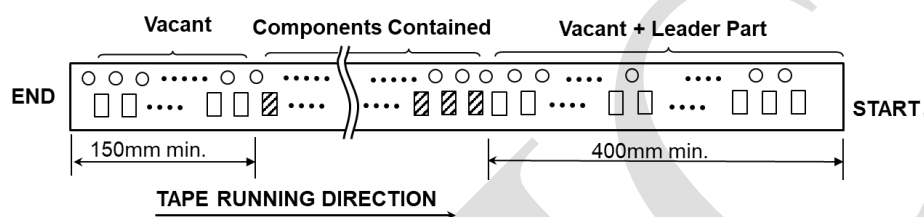


Reel Information

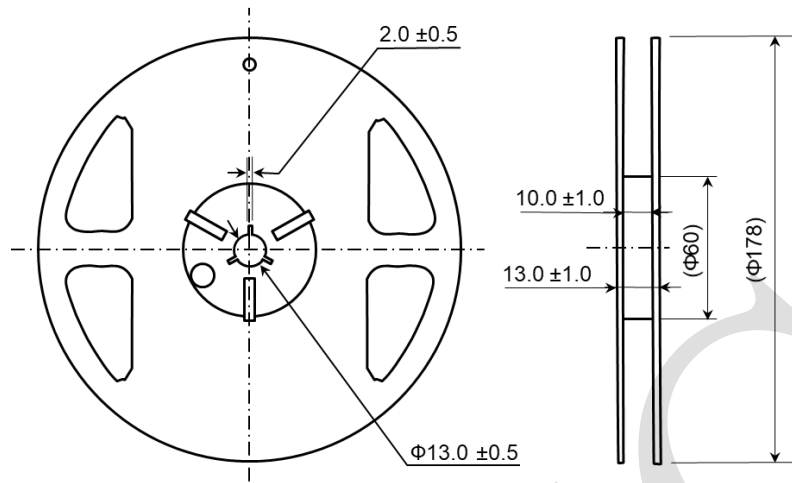

$\Phi 178$ Reel Dimension

UNIT: mm

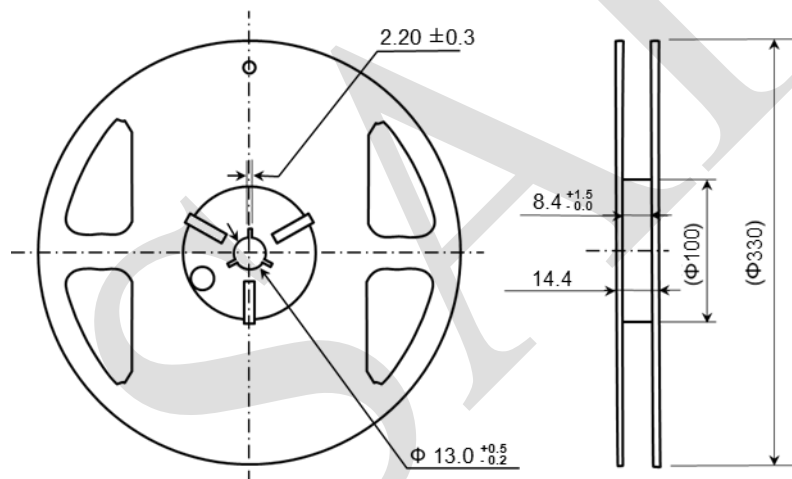

$\Phi 330$ Reel Dimension

UNIT: mm

Ordering Code

Part Number	Description
LBB2018D0D-SA	Bulk (few pieces)
LBB2018D0D-MB	Tape & Reel 3,000 pcs/reel
LBB2018D0D-MC	Tape & Reel 10,000 pcs/reel
LBB2018D0D-SZ	EVB

SALIC

Revision History

Revision	Date	Description
1.0	Nov. 30, 2020	● Initial release

SALIC

Important Notice

The information contained herein is as of the date of issue. The products or all information contained herein is subject to change without notice. Xiamen Sanan Integrated Circuit Co., Ltd. and subsidiaries (hereinafter referred to as "Sanan") assumes no responsibility for errors or omissions in the information contained herein. Customers should verify the latest relevant information before ordering for Sanan products.

All of the contents may be used only for informational purposes by the customer. The information contained herein or any use of such information or Sanan products does not grant, either expressed or implied, to any party the intellectual property rights, patent rights, licenses and related rights. Sanan assume no responsibility for any damages and defects from the use of the information contained herein. Customers should verify Sanan products in actual condition and operating environment before using.

Sanan products are intended for use in mobile phone, PC, AV equipment, OA equipment, home electric appliances, office equipment, or other general electronic equipment. Sanan products are not warranted or authorized for use as critical components in aircraft, power plant, medical, life-saving, life-sustaining and other high reliability applications which can cause severe damages or personal injury or death.

The scope of the warranty of Sanan products is limited to products alone and Sanan does not assume any responsibility for any damages induced by the failure of the products without the express written agreement of Sanan.

Not to be used, duplicated, reproduced, modified, republished and revealed in whole or in part to others without the express written permission of Sanan.

Copyright © 2020 Xiamen Sanan Integrated Circuit Co., Ltd. All Rights Reserved.