

650V/6A

SiC Schottky Barrier Diode

Characteristic


- Zero Reverse Recovery Current
- Positive temperature coefficient
- Temperature-independent performance
- High-speed switching
- Low switching loss
- Low heat dissipation requirements

Application

- Switching power supply
- Power factor correction
- Motor drive, traction
- Charging pile

Product Description

V_{RRM}	650	V
$I_F(135^{\circ}\text{C})$	8	A
Q_C	17	nC

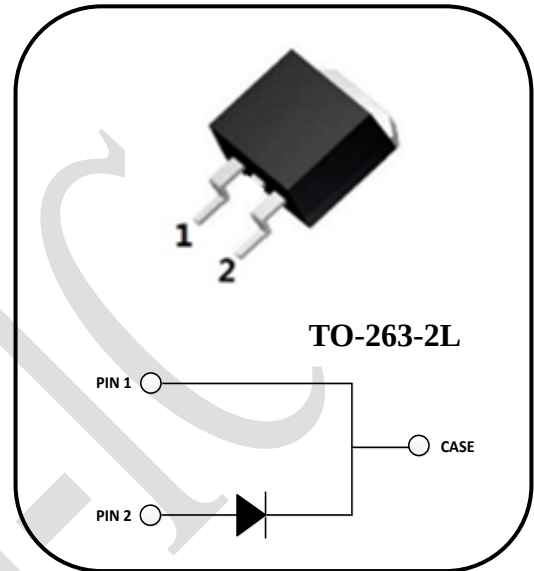

Device	Package	Marking
SDS065J006E2	TO-263-2L	DS065006E2

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit	Test Conditions
Reverse voltage (Repetitive peak)	V_{RRM}	650	V	$T_C=25^{\circ}\text{C}$
Reverse Voltage (Surge peak)	V_{RSM}	650		$T_C=25^{\circ}\text{C}$
Reverse voltage (DC)	V_{DC}	650		$T_C=25^{\circ}\text{C}$
Continuous forward current	I_F	17	A	$T_C=25^{\circ}\text{C}$
		8		$T_C=135^{\circ}\text{C}$
		6		$T_C=153^{\circ}\text{C}$
Surge non-repetitive forward current	I_{FSM}	54	A	$T_C=25^{\circ}\text{C}, t_p=10\text{ms}, \text{half Sine Pulse}$
Repetitive Peak Forward Surge Current	I_{FRM}	30	A	$T_C=25^{\circ}\text{C}, t_p=10\text{ms}, \text{half Sine Wave}$ $D=0.1$
Total power dissipation	P_{TOT}	68	W	$T_C=25^{\circ}\text{C}$
i^2t value	$\int i^2 dt$	14.6	A^2s	$T_C=25^{\circ}\text{C}, t_p=10\text{ms}$
Operating temperature	T_j	-55~175	$^{\circ}\text{C}$	
storage temperature	T_{stg}	-55~175	$^{\circ}\text{C}$	

Thermal Characteristics

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Thermal resistance	$R_{th(j-c)}$	/	2.2	/	$^{\circ}\text{C/W}$	

Electrical Characteristics $T_j=25^{\circ}\text{C}$

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
DC blocking voltage	V_{DC}	650	/	/	V	$I_R=100\text{ }\mu\text{A}$
Forward voltage	V_F	/	1.40	1.70	V	$I_F=6\text{A}$, $T_j=25^{\circ}\text{C}$
		/	1.75	2.50		$I_F=6\text{A}$, $T_j=175^{\circ}\text{C}$
Reverse current	I_R	/	1	20	μA	$V_R=650\text{V}$, $T_j=25^{\circ}\text{C}$
		/	4	120		$V_R=650\text{V}$, $T_j=175^{\circ}\text{C}$
Total capacitance	C	/	311	/	pF	$V_R=0\text{V}$, $f=1\text{MHz}$
		/	33	/		$V_R=200\text{V}$, $f=1\text{MHz}$
		/	28	/		$V_R=400\text{V}$, $f=1\text{MHz}$
Total capacitive charge	Q_C	/	17	/	nC	$V_R=400\text{V}$
Capacitance Stored Energy	E_C	/	2.6	/	μJ	$V_R=400\text{V}$

Typical Electrical Characteristics Curves

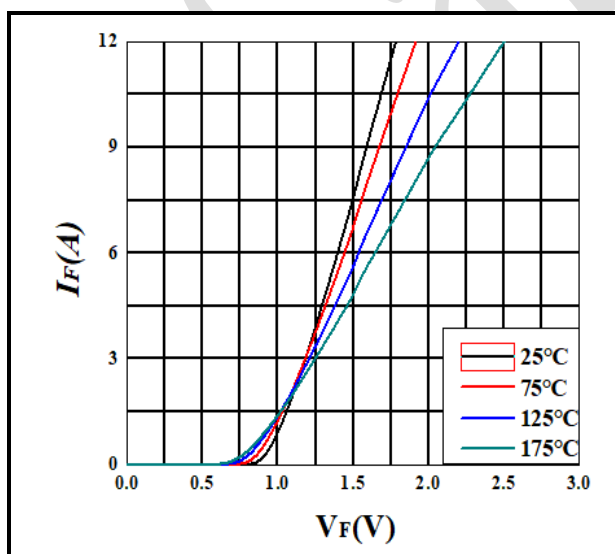


Figure 1. Forward Characteristics

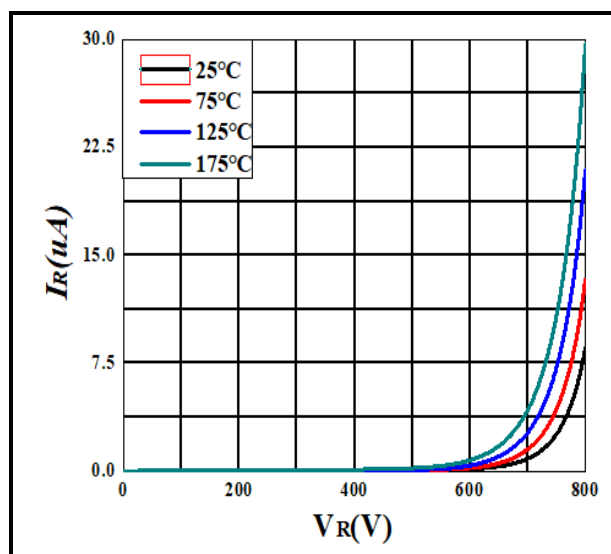


Figure 2. Reverse Characteristics

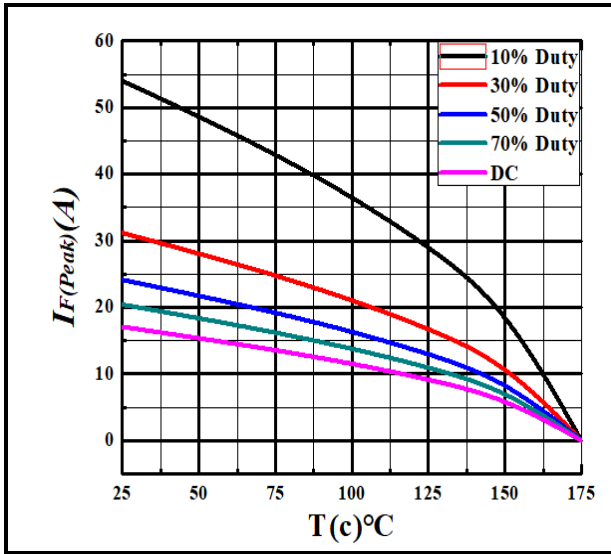


Figure 3. Current Derating

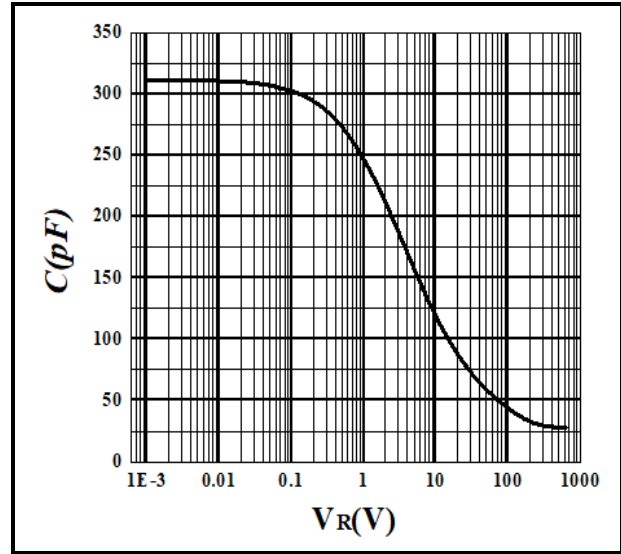


Figure 4. Capacitance vs. Reverse Voltage

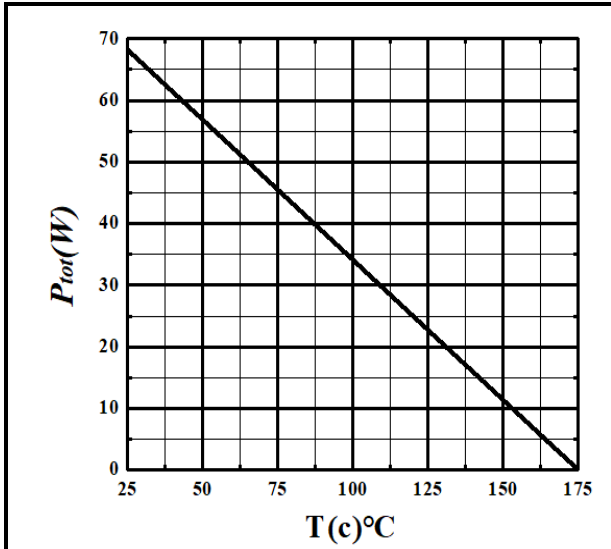


Figure 5. Power Derating

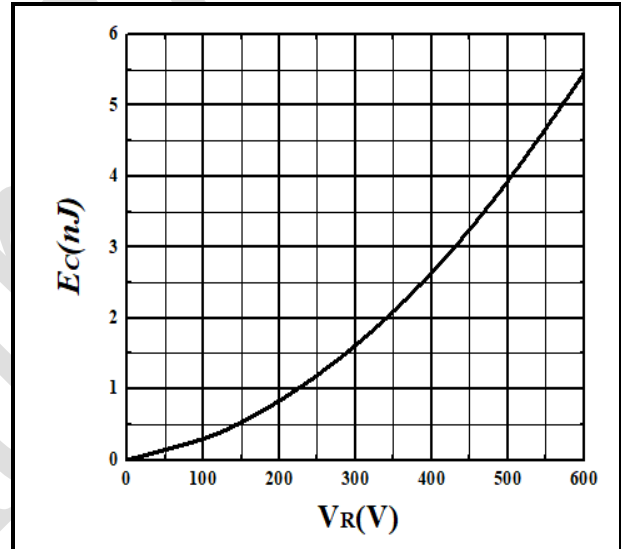


Figure 6. Capacitance Stored Energy


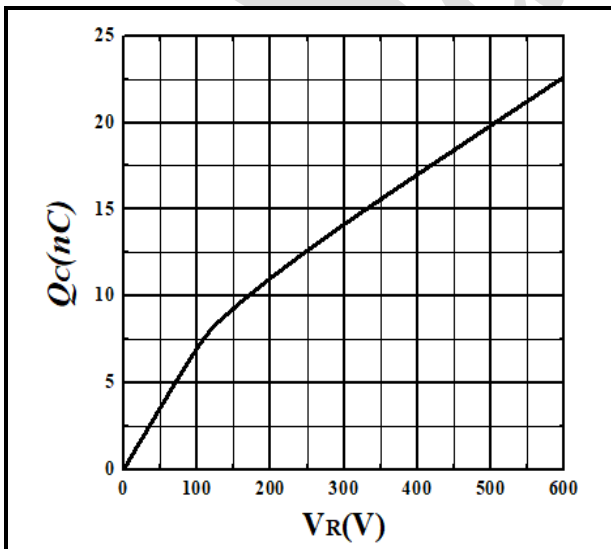


Figure 7. Total Capacitance Charge vs. Reverse Voltage

Package

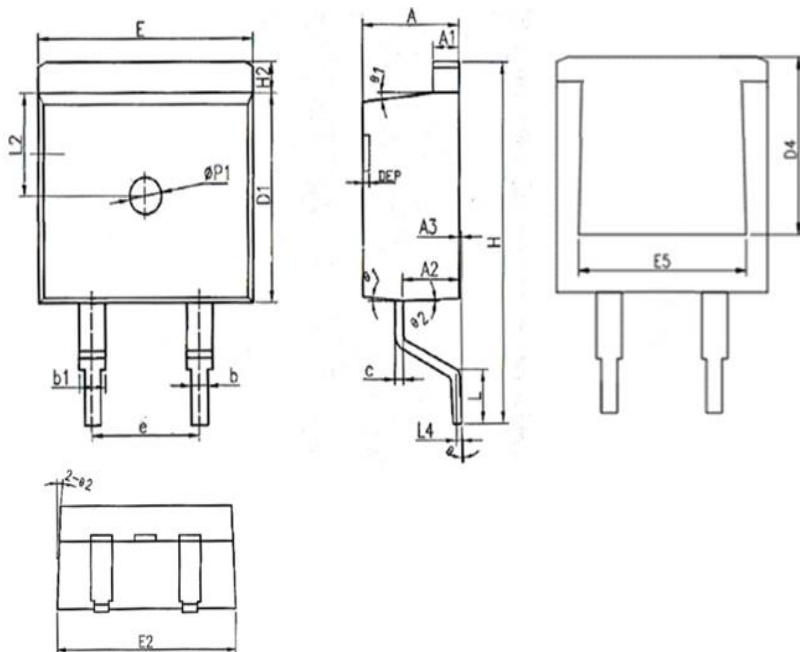

SYMBOL	mm		
	MIN	NOM	MAX
A	4.30	4.50	4.70
A1	1.15	1.30	1.45
A2	2.20	2.40	2.90
A3	0.00	0.13	0.25
b	0.70	0.80	0.95
b1	1.20	1.27	1.36
c	0.45	0.50	0.60
D1	8.59	9.20	9.40
D4	6.60	—	—
E	9.66	9.90	10.28
E2	9.80	10.00	10.20
E5	7.50	—	8.50
e	5.08 BSC		
H	14.70	15.10	15.50
H2	1.10	1.20	1.35
L	2.00	2.30	2.60
L2	4.60 BSC		
L4	0.25 BSC		
θ	0°	—	8°
θ1	3°	5°	9°
θ2	1°	3°	5°
ØP1	2.10	2.30	2.50
DEP	0.05	0.10	0.20

Ordering information

Part Number	SDS065J006E2-ISARH
Package	TO-263-2L
Unit Quantity	800 EA
Packing Type	Tape Reel
RoHS	Yes

Notes

SAIC SiC Schottky diode portfolio: <http://www.sanan-ic.com/>

Copyright © 2021 Xiamen Sanan Integrated Circuit Co., Ltd. All Rights Reserved.