


Data Sheet for SAW Components

Band2 Rx

Single Filter



Product ID: LAS1960A0W

Date: Aug. 20, 2021

Revision: 1.1

Features

- ◆ Package Size : 1.1 x 0.9 x 0.5max mm
- ◆ Single-Ended Input and Output
- ◆ Terminating Impedance : 50 Ω
- ◆ Moisture Sensitivity Level 3
- ◆ ESD Sensitive Device

Electrical Specifications Band2 Rx Single Filter

Temperature Range for Specification : -30 to +85 °C

Ant to Rx					Min.	Typ.	Max.	Unit
Insertion Loss								
	1930	-	1990	MHz	-	1.9	2.5	dB
Pass Band Ripple								
	1930	-	1990	MHz	-	0.8	1.8	dB
VSWR Rx								
	1930	-	1990	MHz	-	1.5	2.0	-
VSWR Ant								
	1930	-	1990	MHz	-	1.5	2.0	-
Absolute Attenuation								
	30	-	824	MHz	35	44	-	dB
	824	-	849	MHz	35	44	-	dB
	849	-	1850	MHz	35	43	-	dB
	1852.4	-	1907.6	MHz	38	44	-	dB
	2065	-	2150	MHz	30	34	-	dB
	2150	-	2400	MHz	30	37	-	dB
	2400	-	2500	MHz	35	45	-	dB
	2150	-	8000	MHz	25	30	-	dB


Maximum Ratings

Item	Rating	Condition / Remark
Storage Temperature	-40 to +85 °C	
DC Voltage	5 V	+25 °C
Input power	+15 dBm	LTE , +55 °C , 2000 h

Recommended Operating Conditions

Item	Rating	Condition / Remark
Operating Temperature, T _{CASE}	-30 to +85 °C	

Package Information

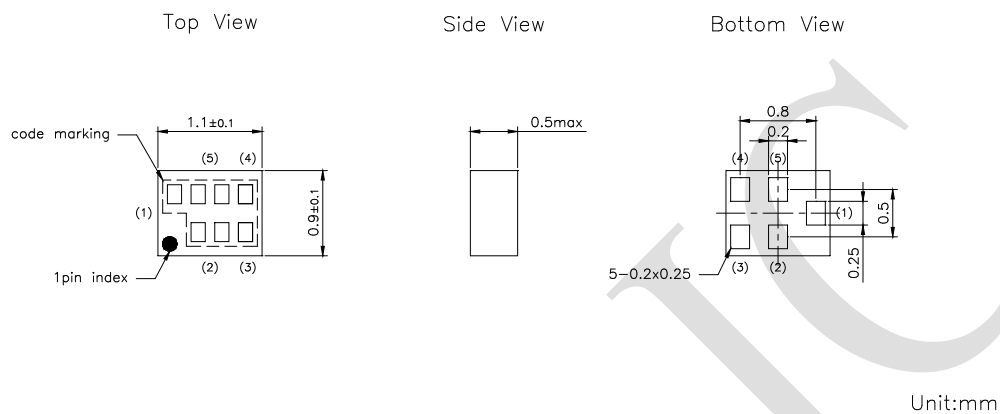

Pin Configuration


1	:	Ant
4	:	Rx
Other	:	GND

Technical drawing of a mechanical part with dimensions:

- Overall width: 1
- Overall height: 0.75
- Top horizontal segment: 0.8
- Top horizontal segment offset: 0.2
- Left vertical segment: 0.25
- Bottom horizontal segment: 0.6
- Right vertical segment: 0.25
- Right vertical segment offset: 0.5

Unit:mm

Application Circuit

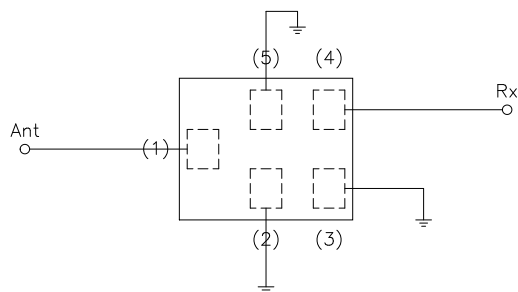




Port	Terminating Z	Matching Component		
Ant	50 Ω			
Rx	50 Ω			

For ESD protection, external shunt inductor at all ports is recommended.

Electrical Characteristics

Band2 Rx Single Filter


Ant to Rx

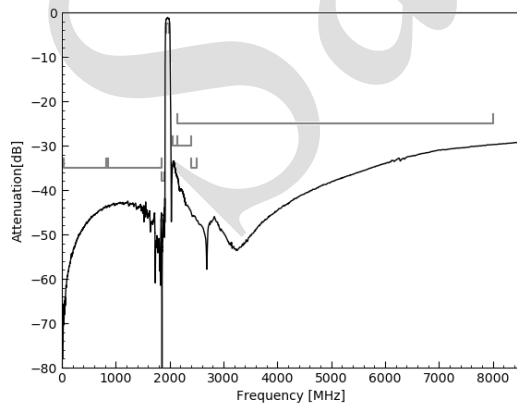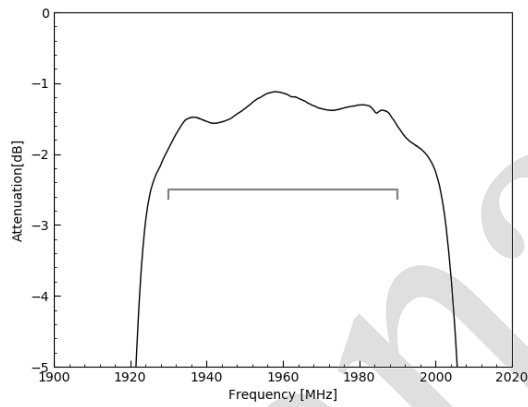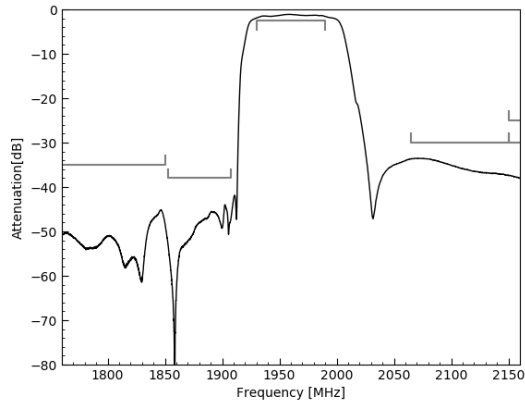


Electrical Characteristics

Band2 Rx Single Filter


Ant Port Impedance

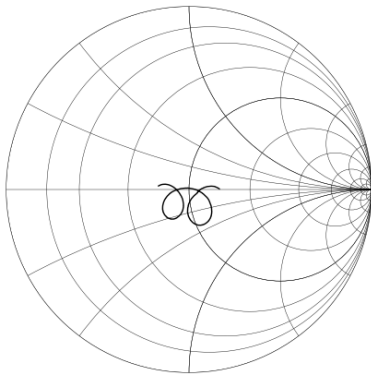

Rx Port Impedance

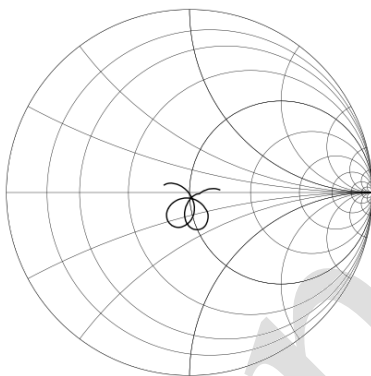

Marking Information

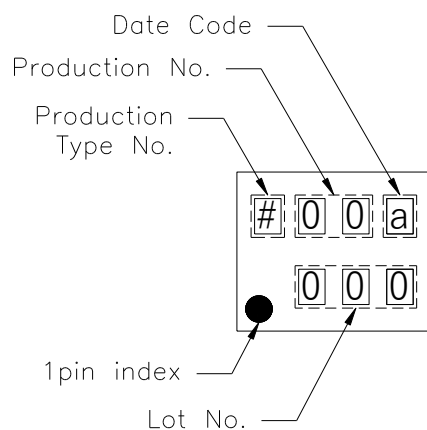

Production type No. (S: Sample, P: Production)


Product No. : 0W

Lot No. (Indicated by 0 ~ 9 or A to Z and a to z, except I, O, i, o and l)


Product date code :

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2021	N	P	Q	R	S	T	U	V	W	X	Y	Z
2022	a	b	c	d	e	f	g	h	j	k	l	m
2023	n	p	q	r	s	t	u	v	w	x	y	z
2024	A	B	C	D	E	F	G	H	J	K	L	M


Tape Information

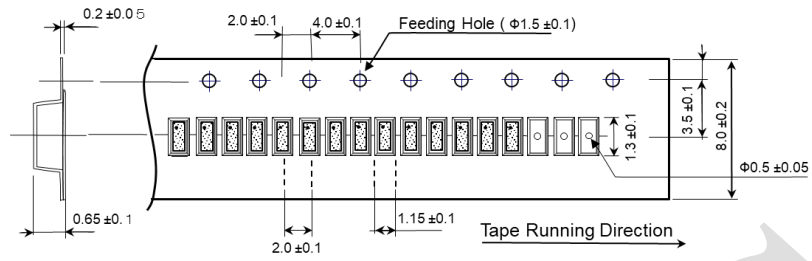

UNIT: mm

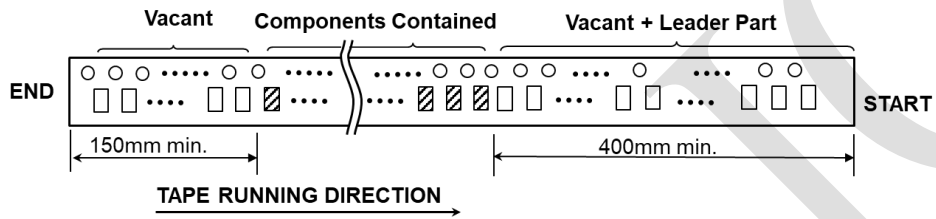

Reel Information

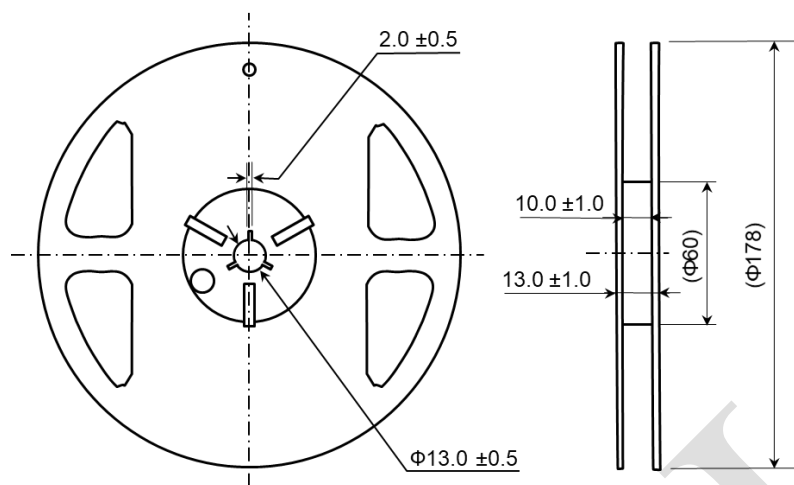

$\Phi 178$ Reel Dimension

UNIT: mm

Ordering Code

Part Number	Description
LAS1960A0W-SA	Bulk (few pieces)
LAS1960A0W-MB	Tape & Reel 3,000 pcs/reel
LAS1960A0W-MC	Tape & Reel 10,000 pcs/reel
LAS1960A0W-SZ	EVB

Revision History

Revision	Date	Description
1.0	Mar. 30, 2021	● Initial release
1.1	Aug. 20, 2021	● Fixed spec

Important Notice

The information contained herein is as of the date of issue. The products or all information contained herein is subject to change without notice. Quanzhou Sanan Integrated Circuit Co., Ltd. and subsidiaries (hereinafter referred to as "Sanan") assumes no responsibility for errors or omissions in the information contained herein. Customers should verify the latest relevant information before ordering for Sanan products.

All of the contents may be used only for informational purposes by the customer. The information contained herein or any use of such information or Sanan products does not grant, either expressed or implied, to any party the intellectual property rights, patent rights, licenses and related rights. Sanan assume no responsibility for any damages and defects from the use of the information contained herein. Customers should verify Sanan products in actual condition and operating environment before using.

Sanan products are intended for use in mobile phone, PC, AV equipment, OA equipment, home electric appliances, office equipment, or other general electronic equipment. Sanan products are not warranted or authorized for use as critical components in aircraft, power plant, medical, life-saving, life-sustaining and other high reliability applications which can cause severe damages or personal injury or death.

The scope of the warranty of Sanan products is limited to products alone and Sanan does not assume any responsibility for any damages induced by the failure of the products without the express written agreement of Sanan.

Not to be used, duplicated, reproduced, modified, republished and revealed in whole or in part to others without the express written permission of Sanan.